



# DISH 322

| Feature                            | DISH 322 |
|------------------------------------|----------|
| Number of Satellite Tuners         | 2        |
| Independent TVs Supported          | 2        |
| Supports HDTV                      | No       |
| Digital Video Recording            | No       |
| DISH Home Interactive TV           | Yes      |
| On-Screen Caller ID*               | Yes      |
| Optical Digital Audio Output       | No       |
| Remotes                            | 2        |
| DISH Pro Plus Compatible           | Yes      |
| Software Upgradeable via Satellite | Yes      |


DISH 322 features two tuners for independent satellite TV viewing on two separate televisions, all in a slim-line chassis design.

## FEATURES

- Two tuners for independent viewing of satellite TV programming in two rooms with a single receiver.
- "Agile modulated mono output" can send the second tuner's signal to multiple televisions via home distributions.
- DISH Home Interactive TV.
- On-screen Electronic Program Guide (EPG) with access to up to two days of program listings/information.
- Parental control locks, themes lists, favorites lists, browse, one-touch channel return, closed-caption support and alternate audio.

## REMOTE CONTROLS

- "TV1" operates via infrared remote control commands; "TV2" operates via UHF Pro remote control commands.
- One Infrared (IR) 4-component universal remote control – controls "TV1" (the room with the DISH 322 receiver). Can be programmed to operate (via IR) up to three additional components.
- One UHF Pro/IR configurable 4-component universal remote control. Controls "TV2" (second TV location) when configured for UHF Pro (blue key); can control "TV1" if configured for IR (green key).
  - Configured as "TV2" UHF Pro remote, it controls satellite receiver up to 200 feet away through walls and other obstructions. It can be programmed to operate (via IR) up to three additional components, such as TVs, VCRs and DVD players.
- "Recover" button toggles through TV inputs to assist customer in returning to satellite programming (future use).

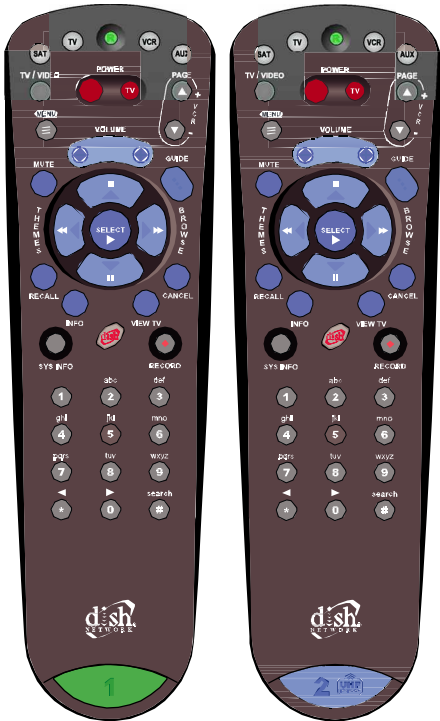

## FRONT PANEL FEATURES

- Buttons: Power, Channel Up, Channel Down
- Indicator Lights
  - Green "POWER" TV1 LED indicates the TV1 tuner is on
  - Blue "POWER" TV2 LED indicates the TV2 tuner is on
- IR remote sensor, IR blast emitter (TV1 only)
- Door and smart card receptacle (unused)

## REAR PANEL FEATURES

- 2 satellite tuner inputs
- 1 UHF Pro remote antenna input
- 1 telephone jack
- 3-prong power cord
- **TV1 Connections**
  - 1 set RCA-type audio/video outputs
  - 1 S-video output
  - 1 RF modulated output (channel 3/4)
  - 1 TV antenna/cable input
- **TV2 Connections**
  - 1 set RCA-type audio/video outputs
  - 1 agile modulated output (channels 21-69; 73-125); mono audio

## SPECIFICATIONS

- Dimensions (approx.): 1.75"H x 15"W x 10.625"D
- Weight (approx.): 5.25 lbs.
- Color: Matte black with silver buttons
- DISH 322 Standalone Receiver  
Part number: 119941
- DISH 322-22D System (includes DISH 500 antenna and DISH Pro Twin LNBF)  
Part number: 119970

\*Requires Caller ID subscription with local phone company. Phone line must be connected to receiver.

